


CHAMELEON SURFACE ROUND WALLWASH

Surface Mounted



Key Features:

- Up to 1050lm delivered output
- High uniformity light distribution Emin./ Emax.= 1/3
- 5 years limited warranty
- Chicago plenum rated



Technical Data:

Body Material	Die-cast	Delivered Lumen Range	520 lm to 1050 lm
Safety	Chicago Plenum	Output Type	Constant Current
Warranty	5 Years	Driver	Integral
Light Source	COB	Code Compliance	CCEA / CCC / CSA / CE / ETL / JA8
Lifetime	L80/B10 @ 70,000 hours	CRI	90+
Power Range	10W to 22W	CCT	2700K / 3000K / 3500K / 4000K / Tunable White / Dim to Warm / RGBW

Housing Code :

Code Example: SCHSW2109

SCHS	Power	Voltage	Control	Housing	Emergency
Type					
SCHS	Mono:	2	0	O	N
	L	240-220V	Non-Dim	Octagonal J-Box	No
	10 W - 650 lm	U	1	N	9
		Universal 120 to 277V	0-10 to 1%	No J-Box	90 mins
	M		2		
	12 W - 790 lm		0-10 Fade-off		
	H		D		
	18 W - 1180 lm		DALI		
	V		P		
	22 W - 1440 lm		Phase ELV & Triac		
	Dim to Warm:		L		
	L		Lutron		
	10 W - 530 lm		X		
			DMX		
	M				
	18 W - 1070 lm				
	Tunable White:				
	L				
	10 W - 580 lm				
	M				
	18 W - 850 lm				
	RGBW:				
	L				
	4 W - 420 lm				

Module Code :

Code Example: SCMSWLWWD59270

▼ Fill in the same **power** code value for the housing and module.

SCMSW	Power	Body Finish	Baffles Finish	UL Rating	Optics Type	CRI	CCT	Accessory
Type								
SCMSW	Mono:	W	W	D	W	9	27	O
	L	White	Flat White	Dry	Washer	90+	2700K	None
	10 W - 650 lm	B	B	W		H	30	T
		Black	Flat Black	Wet		Thrive	3000K	Clear Lens
	M	G	N				35	L
	12 W - 790 lm	Grey	Black Nickel				3500K	Diffuse Lens
	H	X	C				40	F
	18 W - 1180 lm	Custom	Specular Chrome				4000K	Elliptical Lens
	V		D				WD	
	22 W - 1440 lm		Diffuse Chrome				3000K - 1800K	
	Dim to Warm:		G				TW	
	L		E				2700K - 6500K	
	10 W - 530 lm		Diffuse Gold				CC	
			X				RGBW	
	M							
	18 W - 1070 lm							
	Tunable White:							
	L							
	10 W - 580 lm							
	M							
	18 W - 850 lm							
	RGBW:							
	L							
	4 W - 420 lm							




Notes:

1. Denotes output at 3000K, unless otherwise noted.
2. Denotes output specific to Dim-to-Warm at 3000K.
3. Denotes output specific to Tunable White.
4. Denotes output specific to RGBW.
5. Not applicable for ELV dimming.
6. Hi-lume, Vive, and Athena compatible.
7. Only available with DMX dimming.
8. Not applicable for integral driver.




CHAMELEON SURFACE ROUND WALLWASH

Wallwash Distribution



Wallwasher Optimal Spacing

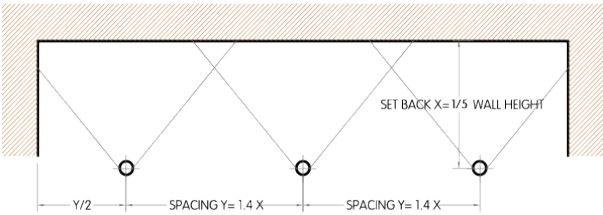

BEAM DISTRIBUTION





Wallwash

Delivered Lumen Output:

Output		Watts				CRI +90			
STATIC-WHITE						2700K	3000K	4000K	
L	10W					610 lm	650 lm	850 lm	
M	12W					740 lm	790 lm	1020 lm	
H	18W					1110 lm	1180 lm	1530 lm	
V	22W					1350 lm	1440 lm	1870 lm	
DIM-TO-WARM 3000K-3000K						3000K			
L	10W					530 lm			
M	18W					1070 lm			
TUNABLE WHITE 2700K-6500K						2700K	6500K		
L	10W					580 lm	670 lm		
M	18W					850 lm	990 lm		
RGBW						R	G	B	W
Total	4W					60 lm	420 lm	60 lm	320 lm

Mounting Flexibility:

SURFACE MOUNTED



Housing:

Octagonal J-Box

