



CALIBER OUTDOOR CANTILEVER



Key Features:

- Adjustable linear optic (0°–90° tilt).
- Wide range of beam angles and elliptical distributions.
- Optional sliding glare shield for beam shaping.
- 420 lm/ft to 1620 lm/ft.
- IP65.

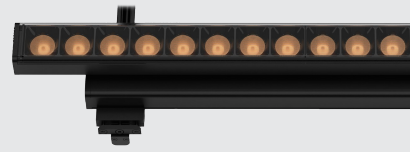

Technical Data:

Body Material	Extruded Aluminum	Delivered Lumen Range	420 lm/ft to 1620 lm/ft
Safety	Chicago Plenum	Driver	Integral / Constant Current
Warranty	3 Years	Code Compliance	CCEA / CCC / CSA / CE / ETL / JA8
Light Source	High Power LEDs	CRI	90+
Lifetime	L80/B10 @ 70,000 hours	CCT	2700K / 3000K / 3500K / 4000K / Tunable White
Power Range	5W/ft to 20W/ft		

Code:

Code Example: BCWC112BXV1ANM9270


BCW											
Type	Mounting	Length	Body Finish	Power	Voltage	Control	Baffles Finish	Optics Type	CRI	CCT	Glare Shield
BCW	C3 12" Cantilever	24 24 inch	W White	Mono: L 5 W - 480 lm/ft	1 120V	A Non-Dim	B Flat Black	S 8°	9 90+	27 2700K	G Glare Shield
		36 36 inch	B Black	U 10 W - 835 lm/ft	U Universal 120 to 277V	B 0-10 to 1%		N 15°		30 3000K	X No Glare Shield
		48 48 inch		H 15 W - 1170 lm/ft		D DALI		F 34°		35 3500K	
				V 20 W - 1515 lm/ft				W 60°		40 4000K	
				Tunable White: U 10 W - 710 lm/ft				K 10°x30°		TW 2700K - 5000K	
				A 20 W - 1300 lm/ft							

Notes:


1. Static and dim to warm outputs are at 3000K.
2. Athena Node compatibility available upon request.
3. Run length: it is an increment of 1ft for lengths above 4ft with the combinations of the standard lengths.



VERY NARROW DISTRIBUTION



8° Beam Angle




A very narrow 8° beam is ideal for illuminating tall vertical surfaces where an emphasis on texture and drama is desired.

NARROW DISTRIBUTION



15° Beam Angle




The narrow 15° beam is a versatile distribution used in a wide range of applications and is ideal for high ceilings and illuminating tall vertical surfaces.

FLOOD DISTRIBUTION



35° Beam Angle




A 34° flood beam is an optimal option for achieving efficient ambient lighting and is a balance between light punch and ambient uniformity.

WIDE BEAM DISTRIBUTION



60° Beam Angle




The 60° wide beam is an optimal distribution for general lighting with low glare.

ELLIPTICAL BEAM DISTRIBUTION



15°x25° Beam Angle




Elliptical distributions 15°x25° can be used anywhere focused illumination is needed and are ideal for lighting multiple textures on vertical surfaces.

ELLIPTICAL BEAM DISTRIBUTION



30°x60° Beam Angle



Elliptical distributions 30°x60° can be used anywhere focused illumination is needed and are ideal for lighting multiple textures on vertical surfaces.

Delivered Lumen Output:

Per linear foot

Output		Watts		CRI +90	
STATIC-WHITE		2700K	3000K	3500K	4000K
L	5W	420 lm	480 lm	455 lm	465 lm
M	10W	785 lm	835 lm	850 lm	865 lm
H	15W	1145 lm	1170 lm	1240 lm	1260 lm
V	20W	1470 lm	1515 lm	1590 lm	1620 lm
TUNABLE WHITE 2700K-5000K		2700K	5000K		
U	10W	710 lm	710 lm		
A	20W	1300 lm	1300 lm		

Mounting Flexibility:

