


BILLET OUTDOOR WALLGRAZER

Recessed with Trim



Key Features:

- Tight vertical beam.
- High contrast illumination.
- Texture enhancement.
- 385 lm/ft to 1485 lm/ft.



Technical Data:

Body Material	Extruded Aluminum	Delivered Lumen Range	385 lm/ft to 1485 lm/ft
Safety	Chicago Plenum	Dimensions	Refer to Dimensions Table
Warranty	3 Years	Driver	Integral / Constant Current
Light Source	High Power LEDs	Code Compliance	CCEA / CSA / CE / ETL
Lifetime	L80/B10 @ 70,000 hours	CRI	90+
Power Range	5W/ft to 20W/ft	CCT	2700K / 3000K / 3500K / 4000K / Tunable White

Code:

Code Example: BOWR12WL1BWG9270

BOW											
Type	Mounting	Length	Body Finish	Power	Voltage	Control	Baffles Finish	Optics Type	CRI	CCT	Emergency
BOW	R Recessed with Trim	24 24 inch 36 36 inch 48 48 inch 60 60 inch	W White B Black	Mono: L 5 W - 440 lm/ft M 10 W - 765 lm/ft H 15 W - 1075 lm/ft V 20 W - 1390 lm/ft Tunable White: U 10 W - 650 lm/ft A 20 W - 1195 lm/ft	1 120V U Universal 120 to 277V	A Non-Dim B 0-10 to 1% D DALI to 1% E ELV	W Flat White B Flat Black	G Grazer	9 90+	27 2700K 30 3000K 35 3500K 40 4000K TW 2700K - 5000K	N No

Notes:


1. Static and dim to warm outputs are at 3000K.
2. Run length; it is an increment of 1ft for lengths above 5ft with the combinations of the standard lengths.
3. RGBW only available with DMX dimming.
4. Athena Node compatibility available upon request.



BAFFLED WALLGRAZER




15° Wallgrazer



Billet wallgrazer delivers maximum performance for emphasizing textured and rough vertical surfaces. The standard output illuminates walls up to 14'-0" with outstanding transversal and longitudinal glare control.

Wallgrazer Optimal Spacing

Plan View

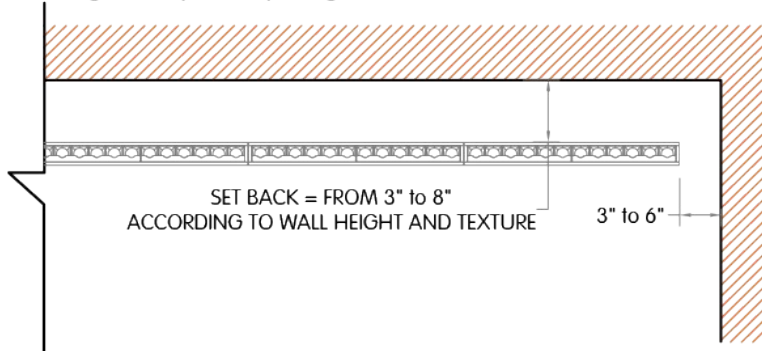



Delivered Lumen Output:

Per Linear Foot

Output		Watts		CRI +90	
STATIC-WHITE		2700K	3000K	3500K	4000K
L	5W	385 lm	440 lm	420 lm	425 lm
M	10W	725 lm	765 lm	780 lm	795 lm
H	15W	1050 lm	1075 lm	1135 lm	1160 lm
V	20W	1350 lm	1390 lm	1460 lm	1485 lm
TUNABLE WHITE 2700K-5000K		2700K	5000K		
U	10W	650 lm	650 lm		
A	20W	1195 lm	1195 lm		

Mounting Flexibility:

RECESSED WITH TRIM

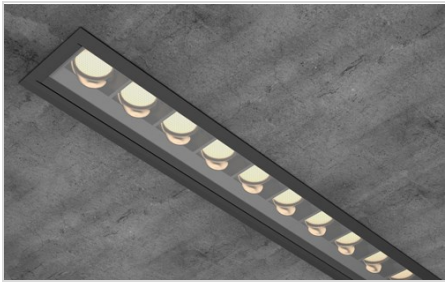

 (L-13/16" x W-13/16")

Actual (inch)
L= 13 3/16" | 25" | 36 13/16" | 48 5/8" | 60 7/16" | Continuous runs
W= 3 7/16"
H= 3 9/16"

