

# STRATA

## PROJECTOR - SYMMETRIC



Strata Projector is a versatile and high-performance luminaire designed to accentuate façades, architectural elements, monuments, and landscape features with controlled precision. Engineered with advanced optical technology, it delivers clean, homogeneous light beams with sharp definition and minimal spill.

A comprehensive range of optical distributions: from narrow to wide, flood and wallwash; allows designers to tailor light exactly to the application.

### CONSTRUCTION

**Product Type :** Projector  
**Body Material :** Aluminum  
**Body Finish :** Black / Grey / White  
 Custom RAL  
**IP Rating :** IP66  
**IK Rating :** IK07

### INSTALLATION

**Environment :** Outdoor  
**Mounting :** Surface Mounted -  
 Spike Mounted - Pole Mounted

### OPTICS

**Optical Distribution :** Symmetric

### LIGHT SOURCE

**Direct Light Source :** COB  
**Luminous Output :** Up to 2030lm  
**Light Source CCT :** 3000K / 3500K / 4000K  
**Color Rendering Index :** Ra80 - Ra90  
**Lifetime :** L80 B10 @ 70,000 Hrs

### ELECTRICAL

**Input Voltage :** 120V / UNV 120-277V -  
 50Hz/60Hz  
**Driver Type :** Integral  
**Dimming :** 0-10V  
**Code Compliance :** ETL / CSA / CE

*\*Note: Custom finishes require a MOQ*

Code example: **SPS**-S-B-LUB-S830-0-F

| Series     | Mounting                 | Body Finish         | Output                            | Voltage                        | Dimming              | Distribution                | CRI          | CCT             | Accessories              | Shields             |
|------------|--------------------------|---------------------|-----------------------------------|--------------------------------|----------------------|-----------------------------|--------------|-----------------|--------------------------|---------------------|
| <b>SPS</b> | <b>S</b> Surface Mounted | <b>B</b> Black      | <b>L<sup>1</sup></b> 8W (760lm)   | <b>1</b> 120V                  | <b>A</b> Non Dim     | <b>S<sup>2</sup></b> 5°     | <b>8</b> +80 | <b>30</b> 3000K | <b>O</b> No Accessories  | <b>H</b> 45° Snoot  |
|            | <b>G</b> Spike Mounted   | <b>G</b> Grey       | <b>M<sup>1</sup></b> 15W (1420lm) | <b>U</b> Universal 120 to 277V | <b>B</b> 0-10V to 1% | <b>N</b> 15°                | <b>9</b> +90 | <b>35</b> 3500K | <b>C</b> Clear Lens      | <b>F</b> Full Snoot |
|            | <b>P</b> Pole Mounted    | <b>W</b> White      | <b>H<sup>1</sup></b> 20W (1850lm) |                                |                      | <b>M</b> 25°                |              | <b>40</b> 4000K | <b>D</b> Diffuse Lens    | <b>O</b> No Snoot   |
|            |                          | <b>X</b> Custom RAL |                                   |                                |                      | <b>F</b> 35°                |              |                 | <b>E</b> Elliptical Lens |                     |
|            |                          |                     |                                   |                                |                      | <b>W</b> 50°                |              |                 | <b>H</b> Honeycomb Lens  |                     |
|            |                          |                     |                                   |                                |                      | <b>E<sup>3</sup></b> 3°x80° |              |                 | <b>V</b> Color Changing  |                     |

#### Notes:

<sup>1</sup> Denotes output at 3000K, unless otherwise noted.

<sup>2</sup> Only available on 8W.

<sup>3</sup> Only available on 8W.

Consult factory for lead-times.


Consult factory for systems using multiple optics and mounting configurations.



**Bold Lighting**  
 1349 Old 41 Hwy NW Suite 150, Marietta, GA 30060, USA  
 info@boldlighting.us www.boldlighting.us t: +1-678-903-4061


PROJECTOR NARROW BEAM

Narrow 15°

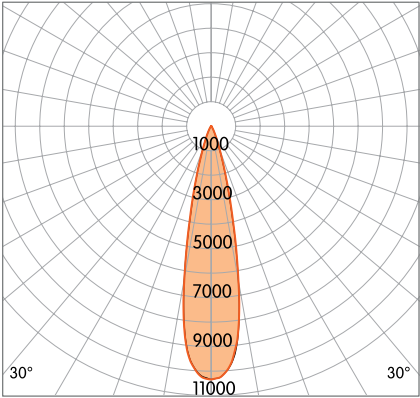


PROJECTOR MEDIUM BEAM

Medium 25°

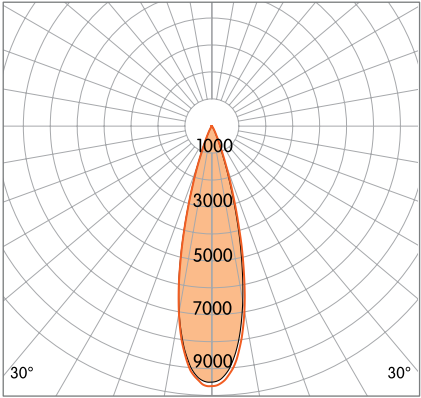


PROJECTOR FLOOD BEAM

Flood 35°

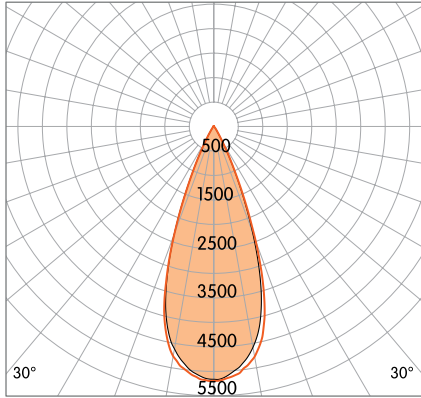



PROJECTOR WIDE BEAM

Wide 50°


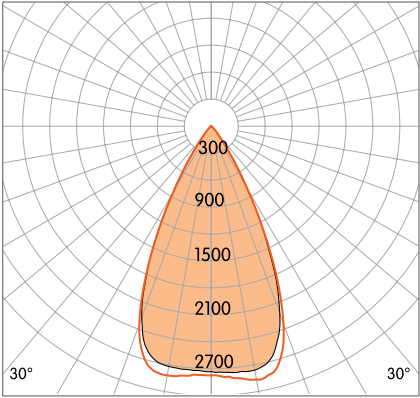


## MOUNTING FLEXIBILITY

### SURFACE MOUNTED

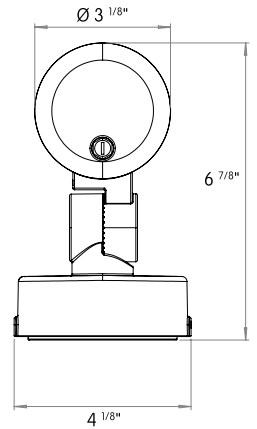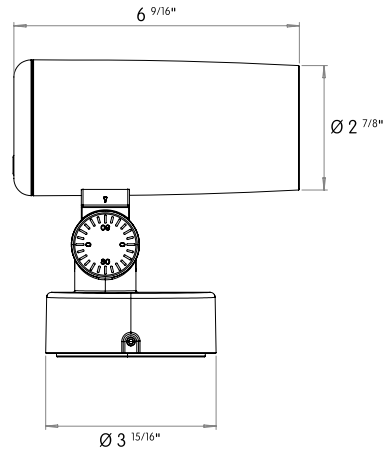


### SPIKE MOUNTED

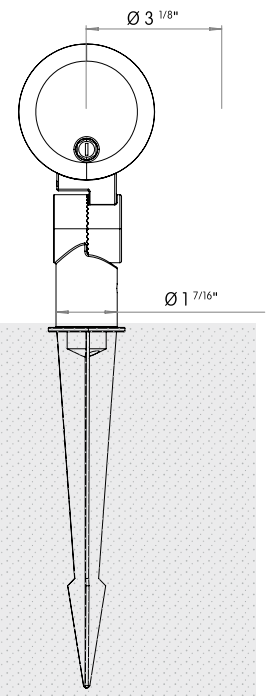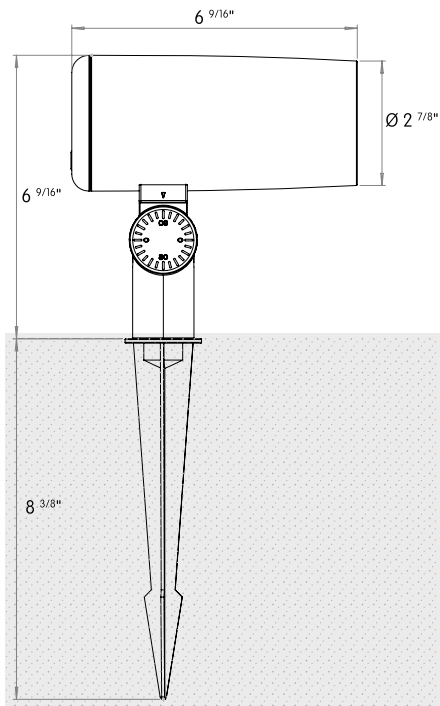

MOUNTING FLEXIBILITY

POLE MOUNTED

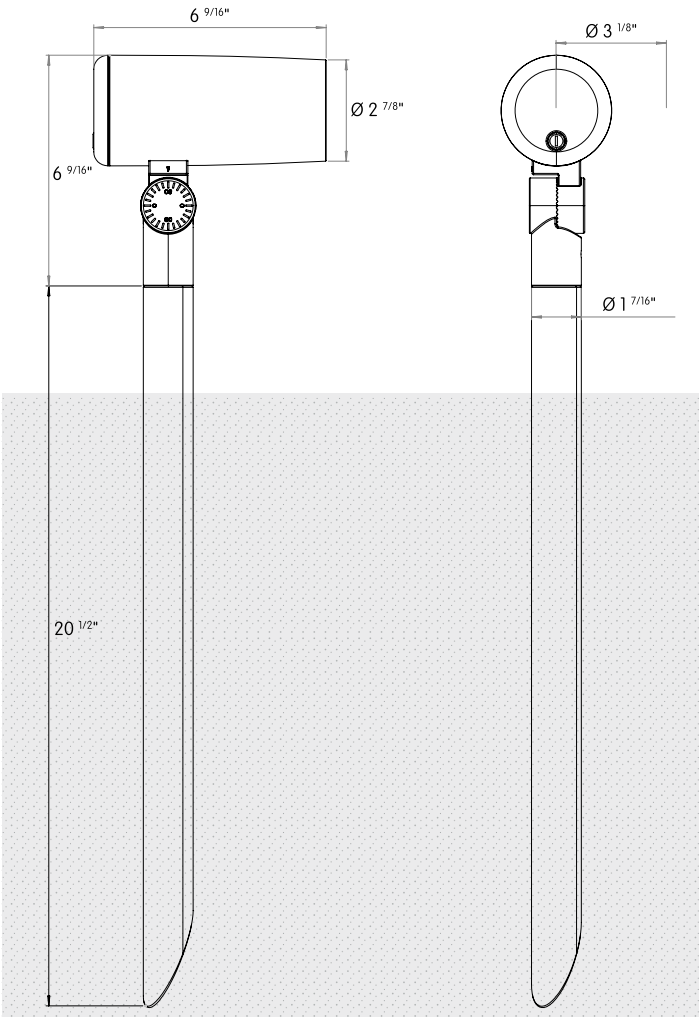

DELIVERED LUMEN OUTPUT

| Output       |  | Watts | CRI 80  |         |         |
|--------------|--|-------|---------|---------|---------|
| STATIC-WHITE |  |       | 3000K   | 3500K   | 4000K   |
| L            |  | 8W    | 760 lm  | 790 lm  | 820 lm  |
| M            |  | 15W   | 1420 lm | 1490 lm | 1560 lm |
| H            |  | 20W   | 1850 lm | 1940 lm | 2030 lm |

