



Strata redefines outdoor step lighting through a refined architectural language, where precision-engineered aluminum shapes both structure and light. Its clean geometry and layered composition create depth, transforming a functional element into a discreet architectural statement.

Strata delivers controlled, glare-free illumination, ensuring optimal visual comfort while enhancing horizontal surfaces. The precisely directed beam highlights pathways and transitions, providing safety without visual disturbance.

CONSTRUCTION

Product Type : Steplight
Body Material : Aluminum/Steel
Body Finish : Black / Grey / White
 Custom RAL
IP Rating : IP67
IK Rating : IK09

INSTALLATION

Environment : Outdoor
Mounting : Wall Recessed

OPTICS

Optical Distribution : Steplight

LIGHT SOURCE

Indirect Light Source : Mid-Power LEDs
Luminous Output : Up to 1170lm
Light Source CCT : 3000K / 3500K / 4000K
Color Rendering Index : Ra70 - Ra80
Lifetime : L80 B10 @ 70,000 Hrs

ELECTRICAL

Input Voltage : 220V - 240V / UNV 120-277V - 50Hz/60Hz
Driver Type : Integral
Dimming : 0-10V / DALI / ELV
Code Compliance : ETL / CSA / CE

Code example: **SOS** - RW - BLU - D - B830

Series	Mounting	Body Finish	Output	Voltage	Dimming	Distribution	CRI	CCT
SOS	R Wall Recessed	B Black	L ¹ 10W (530lm)	2 220V-240V	A Non Dim	B Wide Beam	7 +70	30 3000K
		G Grey	M ¹ 15W (750lm)	U Universal 120 to 277V	B 0-10V to 1%		8 +80	35 3500K
		W White	M ¹ 20W (1075lm)		D Dali to 1%			40 4000K
		X Custom RAL			E ELV			

Notes:
¹ Denotes output at 3000K, unless otherwise noted.


Consult factory for lead-times.
 Consult factory for systems using multiple optics and mounting configurations.

OPTICAL FLEXIBILITY

STEPLIGHT




Steplight Asymmetric Distribution

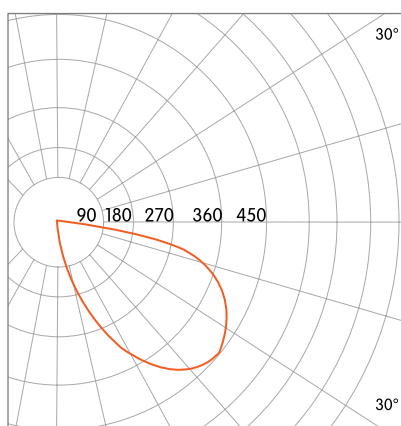

MOUNTING FLEXIBILITY

STEPLIGHT WALL RECESSED

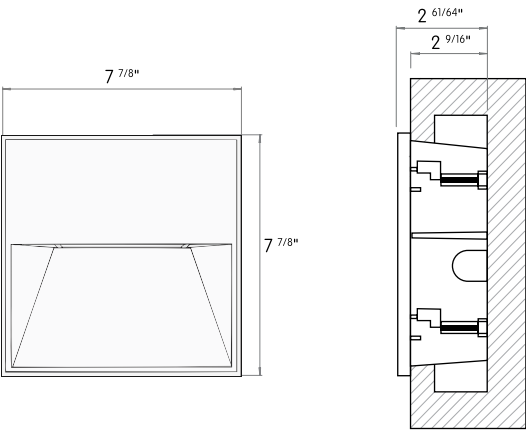

WALL RECESSED

DELIVERED LUMEN OUTPUT

Output		Watts		
STATIC-WHITE		3000K	3500K	4000K
L	10W	530 lm	550 lm	570 lm
M	15W	750 lm	780 lm	810 lm
H	20W	1075 lm	1120 lm	1170 lm