

TERRAIN

STEALTH GRAZER



As a natural extension of the outdoor collection, the Terrain Stealth Grazer is designed to precisely articulate vertical surfaces with clarity and restraint. Its refined linear profile integrates seamlessly into the ground plane, allowing light - not the fixture - to define the architecture.

Engineered with controlled grazing optics, it delivers uniform wall illumination with exceptional glare control. Multiple lengths, color temperatures, and dimming options provide the flexibility required to shape façades with precision, consistency, and visual comfort across the entire project.

CONSTRUCTION

Product Type : Grazer
Body Material : Aluminum/Steel
Body Finish : Black / Grey / White
 Custom RAL
IP Rating : IP67
IK Rating : IK10

INSTALLATION

Environment : Outdoor
Mounting : Floor

OPTICS

Optical Distribution : Floor Grazer

LIGHT SOURCE

Indirect Light Source : Mid-Power LEDs
Luminous Output : Up to 490lm/ft
Light Source CCT : 3000K / 3500K / 4000K
Color Rendering Index : Ra70 - Ra80
Lifetime : L80 B10 @ 70,000 Hrs

ELECTRICAL

Input Voltage : 120V / 220V - 240V / UNV
 120-277V - 50Hz/60Hz
Driver Type : Remote
Dimming : 0-10V / DALI / ELV
Code Compliance : ETL / CSA / CE

Code example: **TOF** - 24B - MUH - G830

Series	Length	Body Finish	Output	Voltage	Dimming	Distribution	CRI	CCT
TOF	12 12"	B Black	M ¹ 10W/ft (450lm)	1 120V	H Non Dim	G Floor Grazer	7 +70	30 3000K
	24 24"	G Grey		2 220V-240V	I 0-10V to 1%		8 +80	35 3500K
		W White		U Universal 120 to 277V	K Dali to 1%			40 4000K
		X Custom RAL			L ELV			

Notes:

¹ Denotes output at 3000K, unless otherwise noted.

Consult factory for lead-times.


Consult factory for systems using multiple optics and mounting configurations.




Bold Lighting
 1349 Old 41 Hwy NW Suite 150, Marietta, GA 30060, USA
 info@boldlighting.us www.boldlighting.us t: +1-678-903-4061

OPTICAL FLEXIBILITY

FLOOR GRAZER


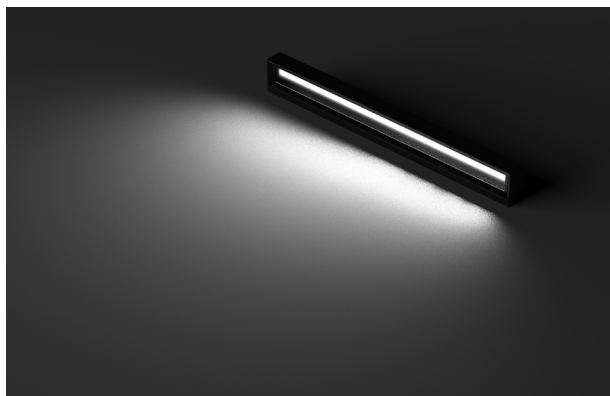


Floor Grazer

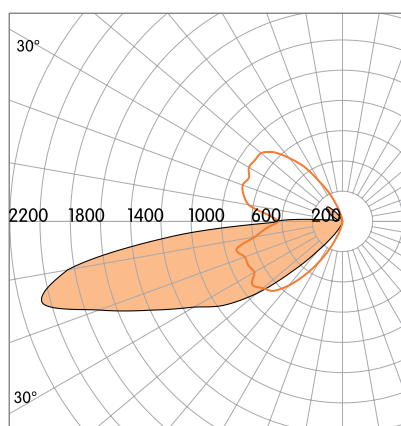

MOUNTING FLEXIBILITY

FLOOR GRAZER

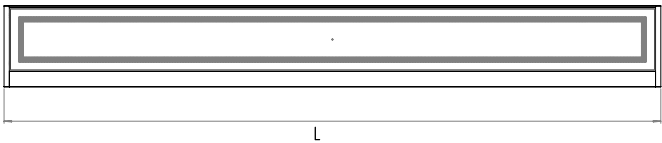

L= 12 3/4" | 24 1/2"

DELIVERED LUMEN OUTPUT
Per Linear Foot

Output		Watts		
STATIC-WHITE		3000K	3500K	4000K
M	10W/ft	450 lm	470 lm	490 lm

